


ASL



Product Datasheet 6.19

Inserts

Standard



Tredsafe®

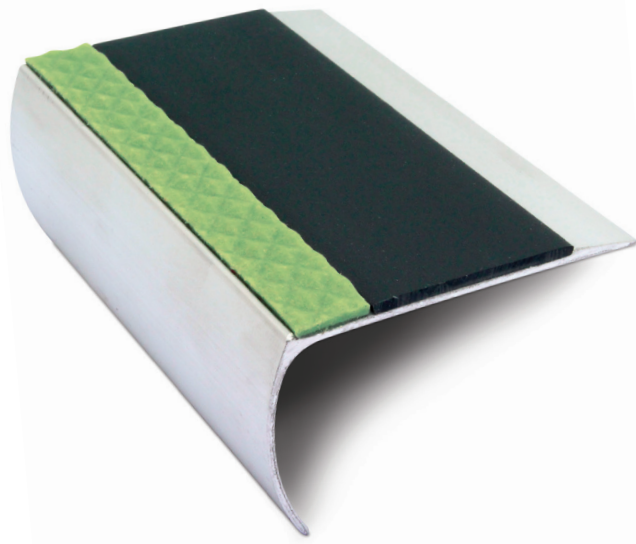

Aluminator® Slimline Nosings



Available Inserts

Standard PVC Insert

A REACH compliant flexible PVC extrusion grade specifically designed for non-scuff stair nosing applications with good anti-slip properties; to our knowledge our inserts achieve the best slip resistance results in the market.

Slip Resistance

Inclined Platform Test DIN 51130:2010

Category: R11


Slip Resistance BS 7976-2:2002

Pendulum Test

PTV Average Dry Value: 66

PTV Average Wet Value: 54

Standard Insert

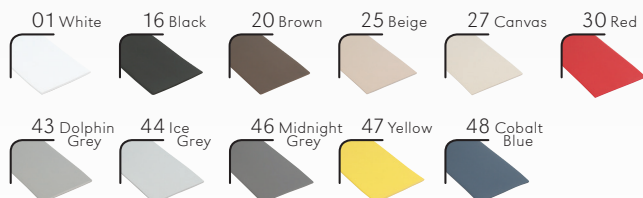

Tredsafe® Insert

Tredsafe insert is manufactured from a special blend of P.V.C., silica quartz and polymeric plasticiser giving an homogeneous hard wearing anti-slip flooring for wet and dry conditions. (Meets British Standard for Sheet Vinyl and Vinyl Tiles BS3261:1973).

Tredsafe insert is resistant to attack from ultraviolet light, oil, grease, petrol, salt, dilute acids and alkalis, common household chemicals and detergents. Organic solvents will soften Tredsafe insert.

Tredsafe insert is produced with a polyurethane coating which reduces dirt retention. The three dimensional pyramid pattern which provides excellent slip resistance in the wet will require more care than a smooth flooring surface. As with any flooring, regular maintenance is important to prevent excessive soiling. Cleaning is best achieved by scrubbing with a bristle brush in conjunction with warm soapy water. Commercial cleaning machines such as the "Scrub-Vac" are also suitable

Slip Resistance

Inclined Platform Test DIN 51130:2010

Category: R11

Slip Resistance BS 7976-2:2002

Pendulum Test

PTV Average Dry 57

PTV Average Wet 47

Residual Indentation

(2.5mm dial gauge) Mean 0.05mm

Dimensional Stability

80°C for 6 hours) 0.12%

Moisture Movement

23°C for 24 hours) 0.02%

Elastic Property

(Tensile Strength 2.48mj/m³)

Heat Ageing

(70°C for 15 days) Exudation None, Colour Change None

Wear Resistance - Taber Abrader

1kg load = 1000 revs.

H18 wheel @ 60 rpm = 0.6gm Weight Loss

Flammability and Smoke Density

Flame Spread = 0

Smoke Dev = 7


Australian Std Test: 1530.3.1982

Mean Critical radiant flux 10.3kw/m²

Mean smoke development rate 85 percentage minutes


Australian Std Test: AS/ISO 9239.1 2003

Tredsafe® Insert




Insert	LRV	SINGLE	DOUBLE
Standard			
01 White	79.9		
16 Black	4.5		
20 Brown	9.1		
25 Beige	41.1		
27 Canvas	53.2		
30 Red	10.6		
43 Dolphin Grey	27.6		
44 Ice Grey	42.1		
46 Midnight Grey	12.8		
47 Yellow	55.7		
48 Cobalt Blue	9.2		
Tredsafe®			
601 White	82.7		
616 Black	4.8		
643 Dolphin Grey	18.2		
647 Yellow	46.1		

Inserts

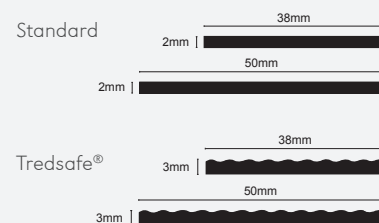

Aluminator® Insert

Product Datasheet 6.19



Description

Aluminator® insert is resistant to attack from ultraviolet light, oil, grease, petrol, salt, dilute acids and alkalis, common household chemicals and detergents. Organic solvents will soften Aluminator® insert.

Aluminator® insert is produced with a polyurethane coating which reduces dirt retention. The three dimensional pyramid pattern which provides excellent slip resistance in the wet will require more care than a smooth flooring surface. As with any flooring, regular maintenance is important to prevent excessive soiling. Cleaning is best achieved by scrubbing with a bristle brush in conjunction with warm soapy water. Commercial cleaning machines such as the "Scrub-Vac" are also suitable

Slip Resistance

Inclined Platform Test DIN 51130:2010

Category: R11

Slip Resistance BS 7976-2:2002

Pendulum Test

PTV Average Dry 57

PTV Average Wet 47

Slip Resistance

The UK slip resistance group recommends the following guidelines;

PTV	Slip Potential
0-24	High
25-35	Moderate
36+	Low

Slip-resistance tests have been independently undertaken by Lucideon Ltd using the pendulum and inclined platform test.

Fields of Application

Exceptional weather and light fastness make Aluminator® inserts suitable for interior and exterior use.

Composition Description

The Aluminator® polymer is a unique Co-polymer blend utilising ethylene-propylene rubber with homo-polypropylene. This grade is a hard wearing, durable plastic compound. The blend is suitable for interior and exterior use. Testing shows good impact resistance at low temperatures.

Technical Details

Description	Aluminator® Lumitred
Chemical Identity	Europium doped Strontium Aluminate
Colour	Green
Peak Wavelength	520nm
Afterglow Brightness (Measured in Milli Candelas after 10 mins excitation)	455 mcd/M ²
Afterglow duration (Time taken to reach an afterflow of 0.32 mcd/M ²)	>3000mins
Highly Visible Afterglow duration	>600mins
Light Fastness	Excellent
Chemical Stability	Excellent
UV Stability	Balance
Intended Use	Light Stablilty of Polyolefin Polymers
Loading	2%



Physical Properties

Physical	Test Method	Nominal Value	Test Method	Nominal Value
Melt Flow Index	ISO 1133	1.0 g/10min	ASTM D1238	1.0 g/10min
Density	ISO 1183	0.90 g/cm ³	ASTM D792	0.9 g/cm ³
Mechanical				
Tensile Stress (Yield)	ISO 527-1	290 kgf/cm ² 28 Mpa	ASTM D638	290 kgf/cm ² 31 Mpa
Tensile Stress (Break)	ISO 527-1	>100%	ASTM D638	>100%
Flexural Modulus	ISO 178	12,500 kgf/cm ² 1,323 Mpa	ASTM D790	13,500 kgf/cm ² 1,320Mpa
Impact				
Notched Izod Impact Strength (23°C)	ISO 180	40 kgf.cm/cm 392 J/m	ASTM D256	40.0 kgf.cm/cm 490 J/m
Notched Izod Impact Strength (10°C)	ISO 180	- kfg.cm/cm - J/m	ASTM D256	4.5 kgf.cm/cm 44 J/m
Thermal				
Heat Deflection Temperature (4.6kgf/cm ²)	ISO 75-1	112°C	ASTM D648	110°C
Vicat Softening Point	ISO 306	153°C	-	-
Additional Property				
Flammability	UL94	HB	UL94	HB

ASL

Product Datasheet 6.19

Inserts

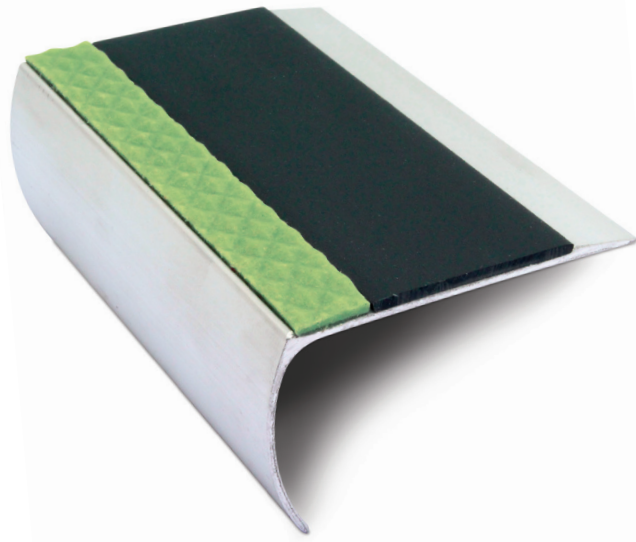

Product Description

In addition to the function of step edge protection the Aluminator® range offers an easy, energy efficient solution to illuminate steps. Should a local or emergency power failure occur on stairways, increasing the risk of hazard for evacuees, the Aluminator® system allows the evacuee to orientate, locate stair edges and risers, and to assist in the safe evacuation of the premises. The system requires no electrical connection, is simple to install and requires no special maintenance other than that which you would normally carry out on any similar product. Only normal illumination, daylight, fluorescent or standard tungsten filaments are required to activate its performance. The highly durable and slip resistant silicone carbide is suitable for external use, ideal for both commercial and domestic applications where public safety is paramount.

The diverse range can be used on a wide variety of substrates such as concrete, timber, tiles, vinyl, steel and checker plate with inserts available in a wide array of colours promoting the visibility while complimenting the aesthetics.

Dimensions

Stock Lengths are available in 2.46m, 2.77m and 3.22m with a selection of Non Slip PVC insert.

Profiles can be anodised and cut to length upon request.

Technical Details

Chemical composition: In accordance with BS EN 573-3:2003 Aluminium and aluminium alloys. The trace elements of the composition which determine the alloy selected are 6063 Thermal Treatment designations: T6. To the best of our knowledge the best in the market.

Manufacturing Tolerance: In accordance with BS EN 755.

Aluminium AA 6063 T6 / UNS A96063 anodised to DIN 17611

Si%	0.2-0.6
Fe%	0.35
Cu%	0.1
Mn%	0.1
Mg%	0.45-0.9
Zn%	0.1
Ti%	0.1
Cr%	0.1
Al	Balance

Slip Resistance

The UK slip resistance group recommends the following guidelines;

PTV	Slip Potential
0-24	High
25-35	Moderate
36+	Low

Slip-resistance tests have been independently undertaken by Lucideon Ltd using the pendulum and inclined platform test.

Aluminium Extrusion Standard

(DIN) EN 755 1994/1997 ; Aluminium and aluminium alloys. Alloy: 6063 Temper: T5

Maintenance

Inserts: All inserts should be cleaned using a neutral detergent and thoroughly rinsed with clean water. Ensure all inserts are dry prior to receiving foot traffic.

Aluminium Channel: These can be polished using steel wool or cloth to maintain the appearance - under no circumstances should solvent cleaners be utilised in cleaning or maintaining Genesis Aluminium Products.

Installation

1. Ensure the steps are dry, clean, free of debris, level and even.
2. If Predrilled use the drill holes to mark steps for drilling location.
3. Drill and Plug the steps.
4. Apply suitable adhesive to the underside of the nosing and apply nosing to the step.
5. Screw down the step with the appropriate size screws.
6. Apply insert (if separate) or insert pip to cover the screw head.

+44 (0)1642 713000 info@genesis-gs.com
www.genesis-gs.com

 **Genesis**
For the Perfect Finish