



multi-pro

RESMPTD1113/001



Technical Data Sheet

Resistant Multi-pro is a new age medium density multi-purpose magnesium oxide board. Multi-pro is suitable for use in semi exposed external applications and areas where occasional damp may occur providing the boards are correctly primed and painted prior to fixing.

For many internal applications the appearance and durability of Multi-pro boards will be enhanced by finishing with paint, plaster or paper. Prior to finishing an acrylic based primer must be applied to edges and face.



Soffit Strips

Note: All Soffit Strips must be primed with an acrylic based primer and finished with an appropriate or suitable top coat.

Key:

1. Brickwork
2. 4mm Multi-pro Soffit Strip
3. Fascia
4. Gutter
5. Downpipe
6. Window



Cavity Closers

Key:

1. Brickwork
2. Blockwork
3. Multi-pro Cavity Closer
4. Roof Truss

MANUFACTURE

Resistant Multi-pro is manufactured using inorganic substances and alkaline resistant fibreglass mesh.

The product is naturally cured using no energy through cold fusion unlike similar competitive products on the market which use autoclaving technology. This ensures that Resistant Multi-pro has a relatively low impact on the environment. Multi-pro achieves its superior strength and flexibility by the introduction of two layers of alkaline resistant glass fibre mesh. Consistent high quality of the product is maintained and monitored through a sophisticated digitally controlled process to ensure a superior finished board always reaches our commitment to quality assurance.

TYPICAL USES

It is ideal for applications requiring a combination of these properties, for example:

- Fire resistance for non-load bearing partitions
- Beam / column and flue fire protection.
- Soffits strips & Cavity Closers
- Fascias & underside of canopies
- Plant rooms
- Integrated garages
- Tilebacker
- Boilerbacker
- Specialist joinery manufacture
- Breathable internal wall lining

Please note this is not a definitive list



www.resistant.co.uk



info@resistant.co.uk



+44 (0)28 9074 9400



+44 (0)28 9074 9420



Technical Data Sheet

Technical	SPECIFIC	ATION	Test Subject	Test	Result
			Density Dry (ex works)		1050 kg/m ³ (+/- 10%)
			Modulus of Rupture	BSEN 310	20 Nmm ²
			Modulus of Elasticity	BSEN 310	4540 Nmm ²
			Impact Strength (Brinell)		34 Nmm ²
			Vapour Resistance	BSEN 12086:1997	2.0 MNs/g
			Durability	BSEN 12467 : 2012	Category B - PASSED
			Thermal Conductivity at 50°	BSEN 594	0.307 w/m/°k
			Fire Test	A1 Euroclass	Class Non-Combustible
			Change in thickness (After immersion in water)	BSEN 317	0 - 0.1% Nmm ²
			Tensile Strength (Perpendicular to plane)	BSEN 319	2.11 Nmm ²
			Screw Withdrawal Strength	BSEN 320	81.1N/mm
			Pull through Resistance of Fixings	BSEN 1383:199	1.267 KN
			Average Thickness Swelling	BSEN 321	0
			Average Tensile Strength	BSEN 321	2.04 Nmm ²
			Moisture Content	BSEN 322	3.6%
			Fire Resistance Steel	BSEN 1364 - 1	60 minutes

DIMENSIONS

Resistant Multi-pro is supplied as a rectangular board with square edges and white in colour.

Thickness: 3, 6, 9 & 12 mm

Sizes: 1200 x 2400 mm, 600 x 2400 x 3mm

Special size requirements and thicknesses are available upon request depending on quantity.

TOLERANCES


Length and Width: + / - 2mm

Thickness: + / - 0.2mm


Edge Straightness: 1mm / metre

Squareness of edge: < 3mm

Technical Data Sheet

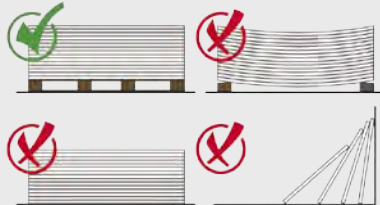

Resistant boards should be stored flat, raised from the ground on a pallet, in dry conditions indoors and be under cover. Boards should not be leant upright for long periods of time

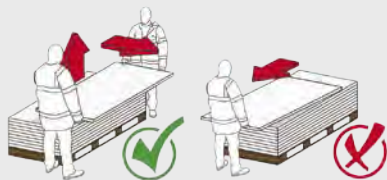

Boards should always be lifted by 2 people and not dragged across each other to prevent unnecessary scratching or damage



Any moisture allowed to infiltrate between the sheets will cause permanent surface staining. They should be protected from the weather and other trades on site at all times



Boards should be carried on edge and extra precaution should be taken to protect the visible front edge and corners

SUPERIOR ATTRIBUTES

Apart from accepting a variety of painted/polished finishes, Resistant boards provide an excellent compatible surface to a wide range of finishing materials i.e. paints, tiles, veneers, laminates or indeed any finishing option that comes to the creative mind of an architect or interior designer. The acceptance of Resistant in the highly competitive international market stands testimony to its superior attributes



Fire Rated, Non-Flammable , Non- Combustible
Non-Combustible to BS 476 Part 4
BS EN ISO 1182 - Euro Class A1



Thermal Insulation Properties
Provides a high level of thermal movements during hot and cold cycles (Thermal Shock)



Impact Resistant
An ability to withstand abuse, including surface impact - 34 N/mm2



Low Carbon Manufacturing Process
A natural cured process with a chemical reaction using low levels of heat and a lengthy drying out stage



Moisture & Water Resistant
Resistant boards will not physically deteriorate when subjected to water or moisture during the construction phase.



Rodent Resistant
Resistant to rodent infestation like mice, rats and insects



Easy and Fast to work
Easy and simple to prepare and attach. Rough surface allows application of renders or direct paint / wallpaper



Mould Resistant
Unlike paper faced/wood based products, Resistant does not contain cellulose, limiting mould growth



Breathability
Ensures a healthy, durable working building with a natural ability to absorb and release moisture



Chemically Stable
Produced from natural inorganic raw materials, resulting in a strong, durable chemically stable board



Non-Hazardous to Health
Will not cause harm to persons and/or the environment.