

EFFISUS



R. José Oliveira Mendes, nº44 4760-912, Vila Nova Famalicão

effisus.com/en/

Tel: +44 (0) 7918 154 109

geral@upwaysystems.com

CPD Article

Published on 12 May 2021 15:39

Facades Interface Waterproofing – EPDM Still an Alternative?

EPDM (Ethylene Propylene Diene Monomer) is a very durable synthetic rubber membrane and is widely used worldwide in a number of different applications on façade walls. It has very stable properties such as vapour, air and watertightness along with elongation of >400% allowing it to accommodate building differential movements.

In addition to that, EPDM is an environmentally friendly material. When installed correctly it has a life expectancy of over 50 years. This durability reduces the construction needs and consequently the disposal quantities to the environment. EPDM sheets can be recycled after used for a number of different things such as rubber mats used in children's playgrounds and car tires. Not only is it the healthiest option for the planet, but it's also the best financial choice. Long lifespan, durability and efficiency means that replacement costs are far less than the alternatives available.

In addition to the advantages listed above, it is important to note that, when exposed to the influence of temperature, UV radiation, and other weather conditions, EPDM does not release toxic substances to the environment.

Key Learning outcomes

- The advantages of using EPDM
- EPDM in the Facade Industry
- CE marking and Tests
- Legal and Technical Requirements
- New Solutions for the future

1.0 EPDM in Facades

Nowadays facade projects are becoming more and more demanding and are constantly pushing the boundaries. Currently, the façade design is challenged to deliver a unique aesthetic façade (curved, twisted, transparent, etc.) and energy-efficient to fit into an inflexible budget/schedule. In most cases, this is a great challenge. Unique aesthetics turn sealing interfaces/construction joints an even harder task. Understanding that seals are crucial at interfaces between elements such as, glazing/wall sheathing board, wall sheathing board/concrete slab (or similar), parapet/roofing connection, GF connections, Curtain wall typology and many other examples is of the most importance. Such joints are particularly vulnerable to water and air leakage along with differential movements and it is vital that a robust, durable and efficient seal is applied.

This solution ensures water, vapour and airtightness to all facade element connections protecting the building and maximizing energy efficiency.

It is reliable to say that applying EPDM in facades brings the following benefits:

- **Robustness:** Water, Air and Vapour tight solution with elongation > 400%
- **Durability** – It has a high life-expectancy even with UV total exposure
- **Predictability** - It allows for bespoke shapes and dimensions allowing to transfer tasks from site to the Factory where there's a controlled environment (better weather conditions, quality workmanship, improved work conditions);
- **Universal** – It is a solution used worldwide in different and extreme weather conditions;
- **Efficiency** - Integrated self-adhesive bands and/or fast-connect clip-in gasket possibilities which improves the quality and speed of application while narrowing the possibilities of human errors;

In facade projects, this membrane is used on the following applications:

- Connections on ventilated facades typology;
- Connections on curtain walls typology;
- Connections on modular and off-site construction;
- Sustainable Construction Projects.



EPDM Membrane applied between window and concrete wall

2.0 CE Marking

It is important to notice that the Construction Products Regulation requires that every product is covered by harmonized European standards or conform to European Technical Assessments, and should normally have CE marking – Approved Document 7. Materials like EPDM should comply to the standard BS EN 13859-2:2014 entitled “Flexible sheets for waterproofing. Definitions and characteristics of underlays. Underlays for walls”. It is also important to refer that the requirements of Approved Document C of the Building Regulations of England in relation to the resistance of water from the outside and the requirements of Approved Documents L1A and L2A in relation to air permeability should be respected.

Important consideration should be given to following properties:

- Resistance to Water Penetration – BS EN 1928:2000 entitled “Flexible sheets for waterproofing. Bitumen, plastic and rubber sheets for roof waterproofing”. Determination of watertightness.
- Water Vapour Transmission Properties – BS EN 1931:2000 entitled “Flexible sheets for waterproofing. Bitumen, plastic and rubber sheets for roof waterproofing”. Determination of water vapour transmission properties.
- Resistance to Air Permeability – BS EN 12114:2000 entitled “Thermal performance of buildings. Air permeability of building components and building elements. Laboratory test methods”.
- Tensile Strength and Elongation – EN 12311-1:2000 entitled “Flexible sheets for waterproofing. Determination of tensile properties. Bitumen sheets for roof waterproofing”.

Technical data	Standard	Unit	Value	Expression of results
Thickness	EN 1849-2	mm	0.80 / 0.75 / 1.00 / 1.30 / 1.50 ± 0.15	
Length		m	≥ 20	MLV
Width		mm	100 – 1300 ± 0.2%	MDV
Directness		-	Pass	
Mass per unit area		g/m ²	750 / 850 / 1250 / 1625 / 1870 ± 25%	MDV
Reaction to fire	EN 13501-1		Class E	Pass
Resistance to water passage	EN 1928 B		W1	
Water vapour properties μ	EN 1931	-	≥ 35.000	MDV
Resistance to air passage	EN 12114	m ³ /(m ² hPa0 Pa)	≤ 0.1	MLV
Tensile strength	EN 12311-1	1050mm	≥ 210 / ≥ 260 / ≥ 300 / ≥ 450 / ≥ 500	MDV
Elongation	EN 12311-1	%	≥ 450 / ≥ 450 / ≥ 450 / ≥ 450 / ≥ 500	
Tear resistance	EN 12310-1	N	≥ 80 / ≥ 80 / ≥ 90 / ≥ 90 / ≥ 130	MDV
Dimension stability	EN 1107-2	%	≤ 0.5	MLV
Foldability at low temperature	EN 1109	°C	≤ -30	MLV
Weathering by combined continuous stress through UV-exposure and high temperature according to appendix C	Tensile strength	1050mm	300 / 410 / 560 / 657 ± 45 / ± 67 / ± 90 / ± 108	MDV
	Elongation	%	400 ± 15%	MDV
	Resistance to water passage	Class W1	W1	

EPDM Technical Properties

3.0 Technical Requirements

EPDM membranes are combustible, class E as per the BS EN13501-1:2018 entitled “Fire classification of construction products and building elements. Classification using data from reaction to fire tests”. Because of that, extreme careful consideration must be given to their use.

Consulting The Building (Amendment) Regulations 2018, at paragraph (2), it states that building work shall be carried out so that materials which become part of an external wall, or specified attachment, of a relevant building are of European Classification A2-s1, d0 or A1, classified in accordance with BS EN 13501-1.

However, looking at paragraph (3), a list of exemptions is present and includes the following items: seals, gaskets, fixings, sealants and backer rods.

CWCT/SFE issued recently an important and reliable clarification to the façade community through the Technical guidance for interpretation in relation to the external walls and specified attachments of Relevant Buildings in England (published in September 2020). They consider ‘Seals’ and ‘Sealants’ included but are not limited to


- Wet applied sealants, used for example at interfaces between elements, at movement joints, panel joints;
- Tapes, used for example to seal joints in sheathing boards and membranes;
- Impregnated foam tapes, used for example at window perimeter seals and movement joints;
- Bonded glazing/structural sealant glazing application.

CWCT states that the sealing of joints between sheathing boards on a framed back wall is of the most importance to limit air leakage and to provide a water barrier within the wall construction.

As non-combustible sealing tapes are not available in the market, strips of membrane may be used to seal these joints. If the membrane has a width of less than 150mm and is protected behind non-combustible insulation, then the membrane is exempt from Regulation 7 (2).

By imposing the previous conditions, the use of a membrane in this location is considered of controlled risk of fire spread.

Seals in interfaces are not exposed; typically, they are fixed between a window and the back wall and covered with non-combustible insulation, or between a curtain wall profile and the surrounding wall by a non-combustible dry lining system.

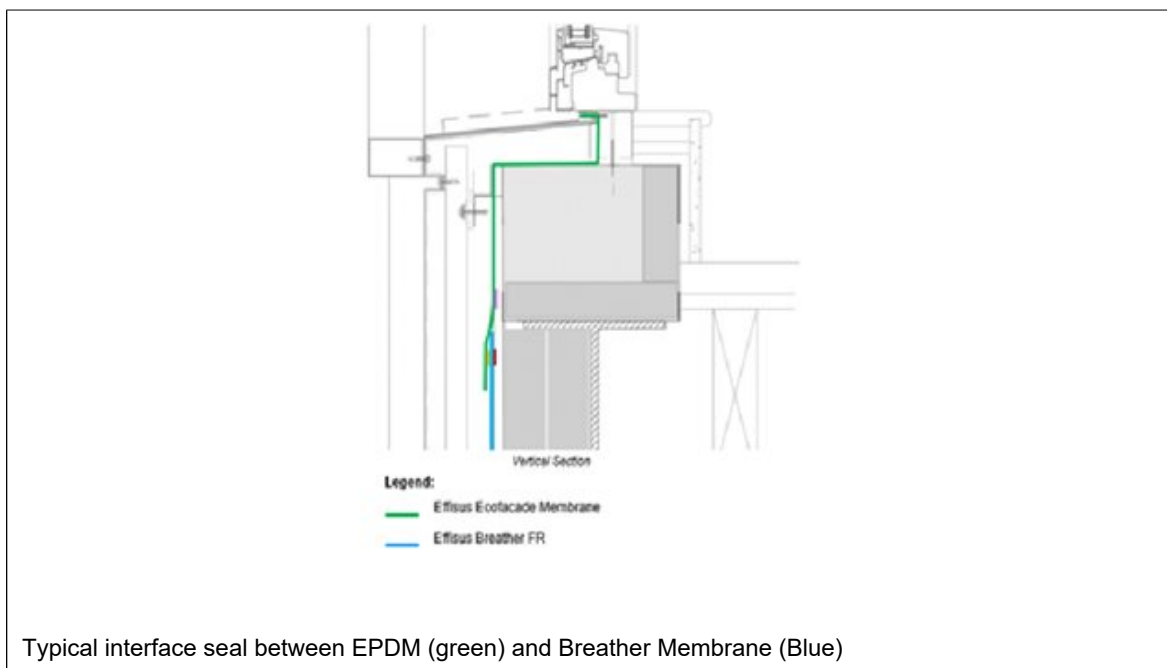

4.0 R&D

Several class B (BS EN 13501-1) fire-rated membranes are now on the market, but they lack the ability to accommodate differential movements on joints/interfaces generally between 5 to 25mm. This property is measured by Elongation/Tensile Strength (BS EN 12311-1) on longitudinal and transverse direction, before and after ageing as per BS EN 13859-2:2014.

It is crucial to understand the meaning of Elongation. It measures the materials' ductility. This measurement shows how much a material can be stretched, as a percentage of its original dimensions, before it breaks. It indicates the ability of a material to undergo significant deformation before failure.

Materials with a higher elongation at break percentage have higher ductility.


High ductility indicates that a material will be more likely to deform and not break, whereas low ductility indicates that a material is brittle and will fracture before deforming much under a tensile load.

EPDM membrane is a weatherproofing membrane (water, air and vapour control) that has an elongation > 400% however it is Class E and flammable.

Take into consideration that a membrane that combines fire performance Class A or Class B with elongation is not available anywhere in the world and, therefore, it is duly recommendable the use of an EPDM membrane.

The current UK regulation considers this material a 'seal' and is exempted from regulation 7(2).

The manufacturers industry is working hard to develop solutions that fulfill all the façade technical requirements (water, air and vapour control) along with elongation and fire performance.

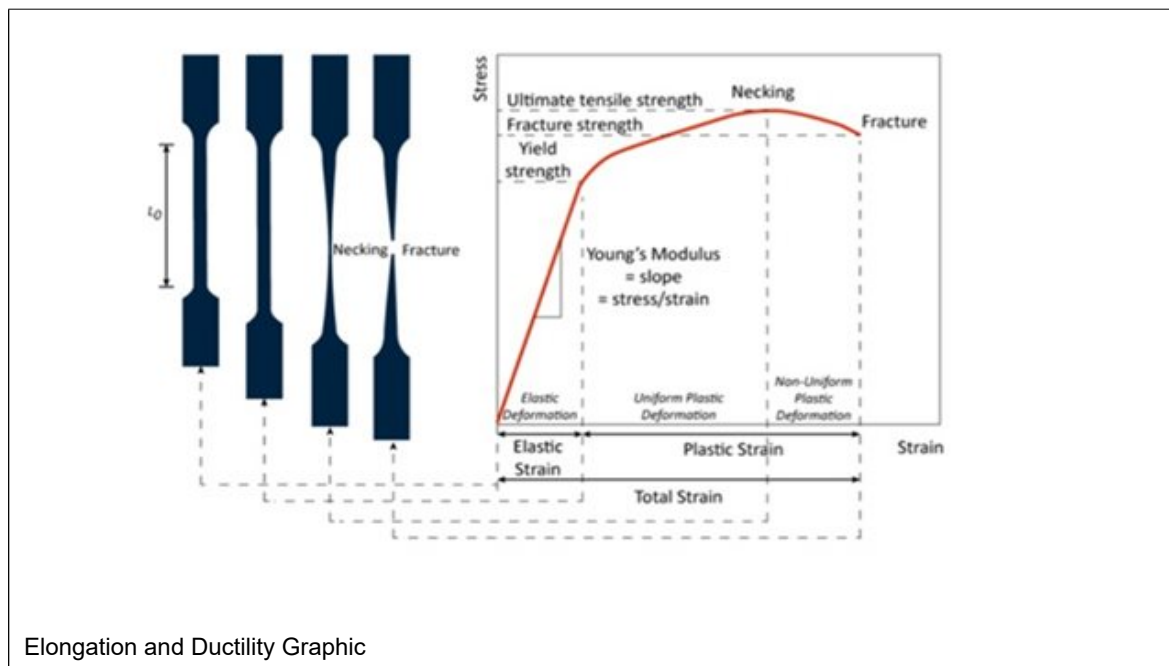

5.0 Conclusion

Considering the above, it is easy to understand the importance of EPDM membranes and that there's a lack of a reliable alternative in the market today.

Until a better solution is found and complying with all current regulations as well as fulfilling all technical requirements for a façade project, EPDM is still the best available product. The membranes width should be reduced to minimize combustibility.

In conclusion all the façade parties such as Manufacturers, Architects, Façade Consultants, Building Control & Government, Building Insurers, Developers and Fire Consultants need to have a pragmatic approach and work in a project-by-project basis, detail by detail. The use of EPDM membranes is not seen as an alternative but should be mandatory.

