

Kross Glaze 600

At a glance

Dimensions for Screen:

Screen max. height – up to 3000mm

Min. pane height – 450mm

Min. pane width – 450mm*

Doors must always be full height

Fire ratings:

N/A

Acoustics:

Single Glazed screens – up to 38dB (Rw)

Double Glazed screens – up to 41dB (Rw)

Single Glazed doors – up to 33dB (Rw)

Double Glazed doors – up to 36dB (Rw)

Structure:

Light duty

Deflection head:

N/A

Door type options:

Kross Glaze doors

Timber doors

Screen glass type options:

Single Glazed - 6.8, 10.8, 12.8mm

Acoustic Lam.

Double Glazed - 6.4 and 6.8mm

Acoustic Lam.

Reeded glass available on special request

*✓ Blinds

✓ Manifestations

✓ Graphics

*✓ SwitchGlass

Paint/ finishes

✓ Polyester powder coat

*✓ Satin anodised aluminium

✓ Special anodised finish

* dependent on system configuration / specification



Kross Glaze is Komfort's industrial style glazing which has led commercial and residential market trends over recent years with its contemporary Art Deco feel. This aesthetic is an intriguing and characterful way of dividing open-plan spaces into beautiful private areas. When balanced with contrasting natural materials, exposed brickwork and biophilic design, our Kross Glaze system comes to life.

Our Kross Glaze systems allow designers to be creative with both glazing and panes, as well as being available with reeded glass. We offer infills for handles on the door leaf, and within the screen and door. This flexibility can be purely decorative, can serve a functional purpose in the case of tech panels for room booking systems and more.

System Specification

The Kross Glaze system is available with options for both single and double glazing, achieving acoustic ratings of up to 41dB (Rw). This 54mm framed glazing system not only includes screens but has a unique 54mm rebated door designed to accommodate the same glazing chairs and beads, creating a flush aesthetic. Our Kross Glaze door is available in single and double glazed options.

Kross Glaze doors are available with lift off hinges or offset pivots on floor springs. All doors within this system must be full height to allow for optimal continuation of the transoms and glazing from screen to door. Kross Glaze screens are constructed up to a maximum height of 3000mm with horizontal transoms to divide the glazing between the uprights; these can be configured as equal splits or staggered, allowing designers to be creative with their construction.

Think partitioning, think Komfort.

Birmingham Office/Head Office

Tel: +44 (0)121 332 2560

Email: headoffice@komfort.com


Technical Support

Email: technical@komfort.com


www.komfort.com




Kross Glaze 600

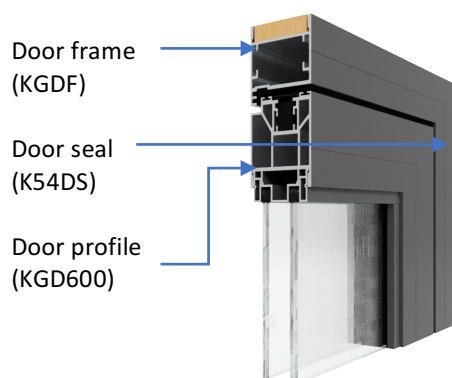


Kross Glaze Door and Frame

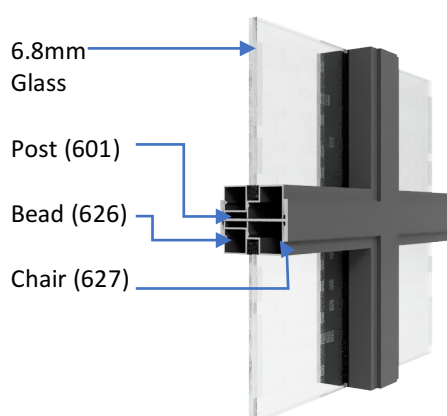


Kross Glaze Single Glazed

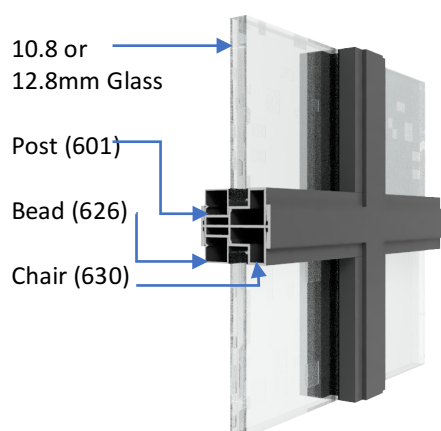

Kross Glaze Single Glazed

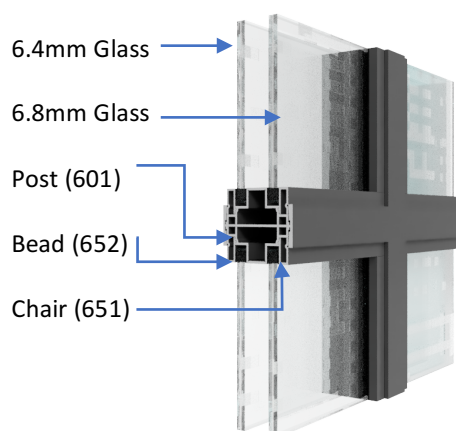

Kross Glaze Double Glazed

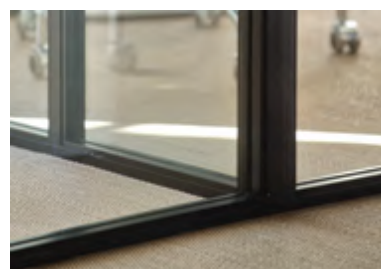

Think partitioning, think Komfort.

Birmingham Office/Head Office
Tel: +44 (0)121 332 2560
Email: headoffice@komfort.com

Technical Support
Email: technical@komfort.com
www.komfort.com